




Repair (with glue) of side in a Terhi ABS-boat

- First find out the whole area that is not fastened in the ABS-plastic.
- Drill a hole (5-6 mm) in the middle of the area and a few small holes on the sides
- Wax the area (then the glue is easier to take off)
- Press in glue from the middle hole until it starts to come out from the other holes
- Put pressure on the against the area (as shown in the picture) and let it dry for 24 h.
- Take off the glue that has come out from the holes, you can use a knife.
- FIX/scrape/paint the holes.

NB

Notice that the temperature must be minimum 15 degrees and the area dry and clean.

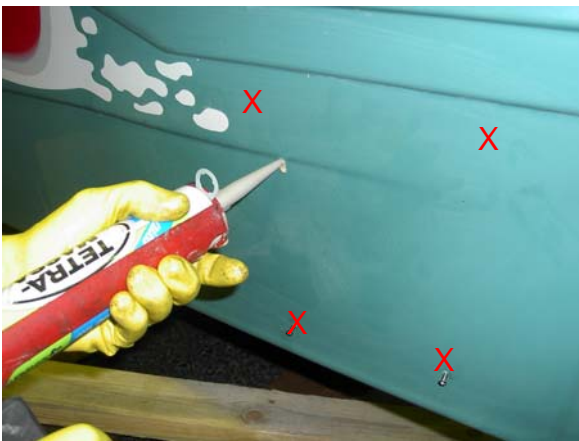

Accessories:

- 1 L Terhi glue
- 2 st Empty tubes for gluepress
- 1 st FIX 120g
- 1 st Paint